


MAINTENANCE FREE BATTERY

ENFORCE




OUTSTANDING PERFORMANCE

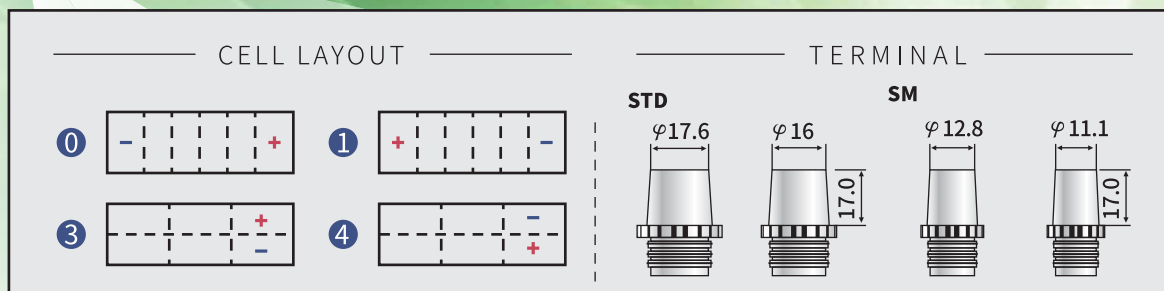


ENFORCE MF BATTERY SPECIFICATION

No	PART NO		TERMINAL TYPE	DIMENSION			VOLTAGE	C20 (AH)	CCA	Cell layout
				L	W	H				
1	40B20R	NS40Z	SMALL	195	130	223	12	36	345	1
2	40B20L	NS40ZL	SMALL	195	130	223	12	36	345	0
3	55B24R	NS60	SMALL	236	129	223	12	45	425	1
4	55B24L	NS60L	SMALL	236	129	223	12	45	425	0
5	55B24RS	NS60S	STD	236	129	223	12	45	425	1
6	55B24LS	NS60LS	STD	236	129	223	12	45	425	0
7	55D23R	55D23R	STD	230	175	225	12	60	550	1
8	55D23L	55D23L	STD	230	175	225	12	60	550	0
9	48D26R	N50	STD	260	172	225	12	50	450	1
10	55D26R	N50Z	STD	260	172	225	12	60	500	1
11	55D26L	N50ZL	STD	260	172	225	12	60	500	0
12	80D26R	80D26R	STD	260	175	225	12	70	600	1
13	80D26L	80D26L	STD	260	175	225	12	70	600	0
14	65D31R	N70	STD	308	174	224	12	70	650	1
15	75D31R	N70Z	STD	308	174	224	12	75	700	1
16	75D31L	N70ZL	STD	308	174	224	12	75	700	0
17	54459	DIN44	STD	210	175	190	12	44	500	0
18	55559	DIN55	STD	242	175	190	12	55	600	0
19	56638	DIN66	STD	275	175	190	12	66	700	0
20	57412	DIN74	STD	275	175	190	12	74	750	0
21	58014	DIN80	STD	275	175	190	12	80	650	0
22	58827	DIN88	STD	353	175	190	12	88	850	0
23	59042	DIN90	STD	353	175	190	12	90	900	0
24	60038	DIN100	STD	353	175	190	12	100	800	0

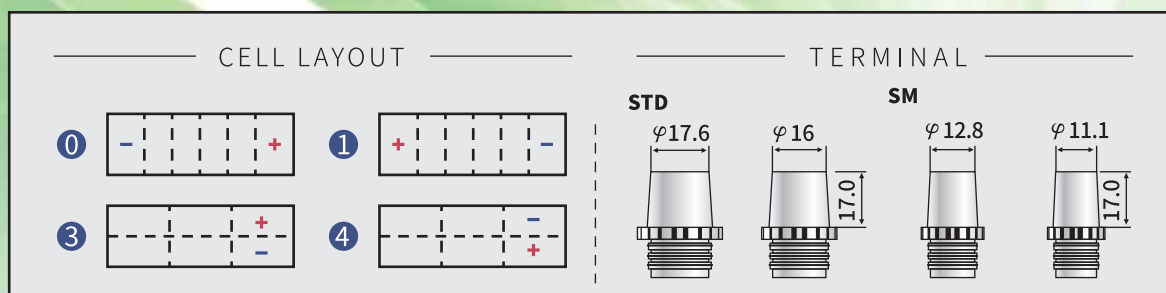

ENFORCE MF BATTERY SPECIFICATION

No	PART NO		TERMINAL TYPE	DIMENSION			VOLTAGE	C20 (AH)	CCA	Cell layout
				L	W	H				
1	95D31R	N80	STD	308	174	224	12	80	750	1
2	95D31L	N80	STD	308	174	224	12	80	750	0
3	105D31R	N90	STD	308	174	224	12	90	800	1
4	105D31L	N90	STD	308	174	224	12	90	800	0
5	115D31R	N95	STD	308	174	224	12	95	850	1
6	115D31L	N95	STD	308	174	224	12	95	850	0
7	95E41R	N100	STD	406	172	220	12	100	850	1
8	115F51	N120	STD	504	179	228	12	120	980	3
9	145G51	N150	STD	509	221	234	12	150	1100	3
10	170G51	N170	STD	509	221	234	12	170	1200	3
11	180G51	N180	STD	509	221	234	12	180	1000	3
12	190H52	N200	STD	515	270	237	12	200	1300	3
13	220H52	N230	STD	515	270	237	12	230	1230	3
14	S31	S31	STD	325	173	237	12	100	800	1
15	65-770	65-770	STD	300	190	190	12	70	770	1
16	78-750	78-750	SIDE	258	178	185	12	65	750	SIDE

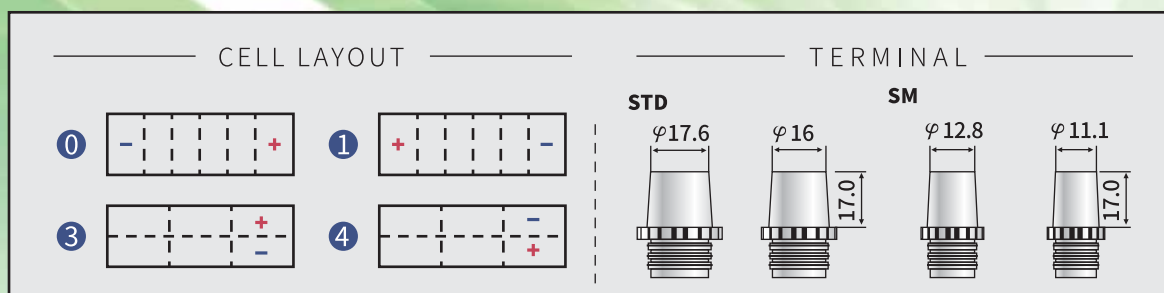

ENFORCE GEL BATTERY SPECIFICATION

No	PART NO	DIMENSION			VOLTAGE	C20 (AH)
		L	W	H		
1	VRLA GEL 100	325	172	222	12	100
2	VRLA GEL 120	406	174	238	12	120
3	VRLA GEL 150	483	170	239	12	150
4	VRLA GEL 200	522	239	216	12	200

